Flexible current clamps

PAN 3000A+ PROFI


Flexible clamp meter 3000 A AC True RMS CAT IV 600 V with automatic function selection for large conductors and hard-to-reach measuring points

- Digital display 21 mm
- **Display backlight**
- **True RMS measurement**
- Automatic range selection
- Data hold
- **LED torch**
- Automatic switch-off

Scope of delivery: Case, Test leads, Operating instructions

Application Benefits at a Glance:

- The flexible measuring loop reaches large or obstructed conductors where rigid clamp meters cannot be fitted.
- Suitable for main conductors, busbars and systems with very high AC currents up to 3000 A.
- The loop can also be routed through narrow cable ducts and around several parallel conductors.

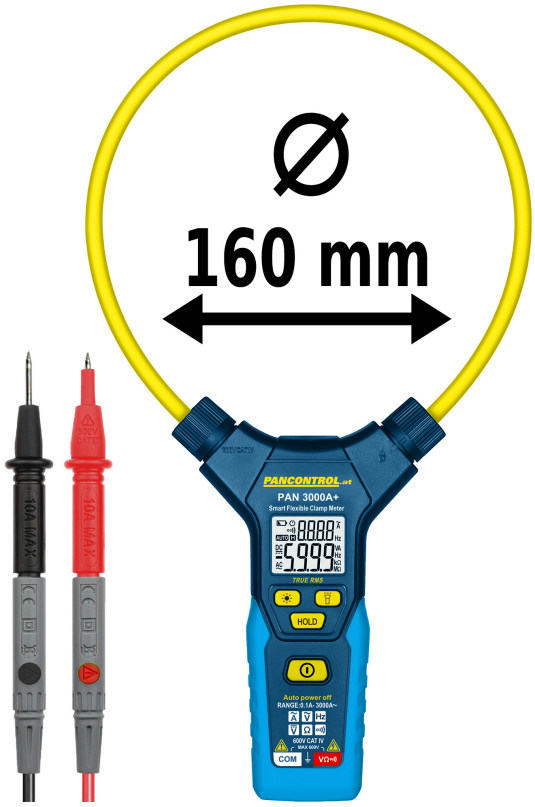

Technical Data	PAN 3000A+
DC voltage DC (V =)	1 mV - 600 V
AC voltage AC (V ~)	1 mV - 600 V
AC current AC (A ~)	10 mA - 3000 A
Resistance (Ω)	1 Ω - 6 MΩ
Audible continuity tester •)))	< 50 Ω
Frequency (Hz)	0,1 Hz - 10 kHz
Clamp opening ⌀	160 mm
Weight (gross / net)	503 / 204 g
Instrument dimensions	176 x 335 x 30 mm
Required battery(ies):	3 x 1,5 V AAA
Measurement category (CAT)	CAT IV 600 V
Accuracy (%)	0,5 % - 3 %





PAN 3000A+ Video DE:

PAN 3000A+ Video EN: