Non-contact voltage testers and magnetic field testers

PAN Voltfinder

PROFI

Non-contact voltage detector 12–1000 V AC with 3-level voltage indication, LED light and screw cap for easy battery replacement

- **Single-pole phase test with acoustic alarm**
- **Contactless indication of AC voltage by red LED and audible signal**
- For phase testing, locating live wires, breaks in cables, defective lamps in string lights, etc.
- Fully insulated, no metallic contact
- Illuminated button as function check
- **LED torch**
- Automatic switch-off


Scope of delivery: Operating instructions



Application Benefits at a Glance:

- The flashlight is located directly at the test tip and illuminates the test point during testing.
- When changing the batteries, the circuit board remains fully covered - reducing the risk of damage from electrostatic discharge.
- The screw cap opens without awkward prying; the range from 12 V also covers low-voltage and control wiring.

Technical Data	PAN Voltfinder
AC voltage AC (V ~)	12 V - 1000 V
Instrument dimensions	158 x 24 x 27 mm
Weight (gross / net)	99 / 31 g
Required battery(ies):	2 x 1,5 V AAA
Measurement category (CAT)	CAT III 1000 V

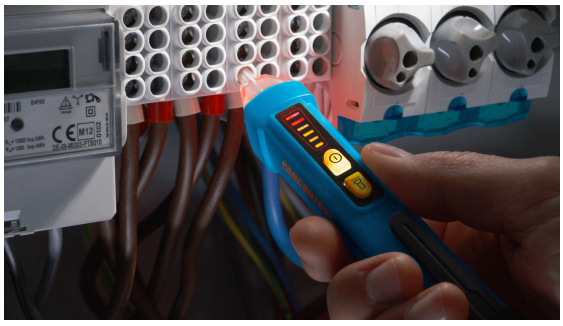



PAN Voltfinder Video DE:

PAN Voltfinder Video EN: